

PRODUCT DATA SHEET



CCT Adjustable Series
2835 140 LEDs/m 9W/m (Dim to Warm)



RS-DTW2835-24V-140D-10-20



Product Features

1. ➤ Source by high output 2835Led with uniform illumination
2. ➤ High Brightness, Efficiency, Customized Wattage, Luminous Flux per M
3. ➤ Tunable white 1800-3000K

CCT Option



IP Rating Option




IP20
Non-Waterproof



IP54
Spary/Nano Coated




IP65
Sillcone glue Coated



IP67
Silicone tube



IP67
Silicone integrated molding/Extrusion



IP68
Sillcone tube injected silicone glue

Dimensions



Note:

LED strip length tolerance is + -0.2%mm.

Width tolerance is + -0.2%mm.

Size of each section is 100mm.

DC 24V

Diagram

Dimension (mm)

Length/Reel	Width	Height	Min. Cutting ✂
5000	10	2.15	Every 100mm (14 LEDs)

Data

Part Number	Working Voltage	Power (W/m)	Current (A/m)	LED Qty/m	CRI
RS-DTW2835-24V-140D-10-20	24V	9W/m	0.3904A/m	140	80+

CCT (°K)	Luminous Efficiency	lumen/m
2200K	97.74lm/W	915.7lm/m

Note:

The data base on IP20 non-waterproof.
The Lumen output value tolerance + -5% due to testing way.
The CCT will be + -100k tolerance.




Absolute Maximum Ratings


Parameter	Symbol	Value	Units
Thermal Measurement Point	Tc	80	
Operating Temperature	Topr	-20~+40	°C
Storage Temperature	Ts	-20~+80	
Number of FPC Connection			




Wiring Diagram Application

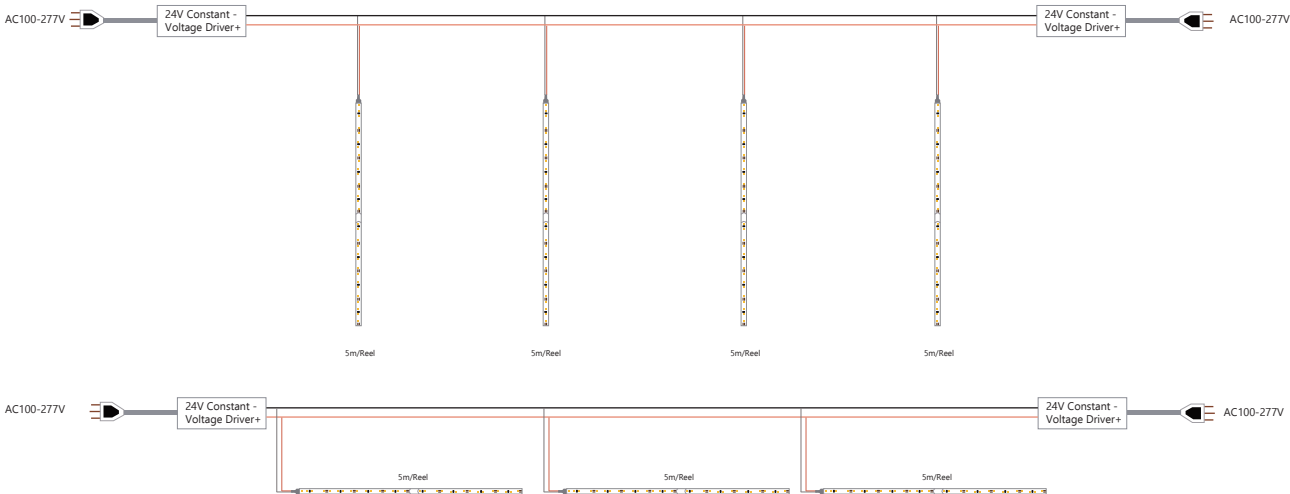


Packaging

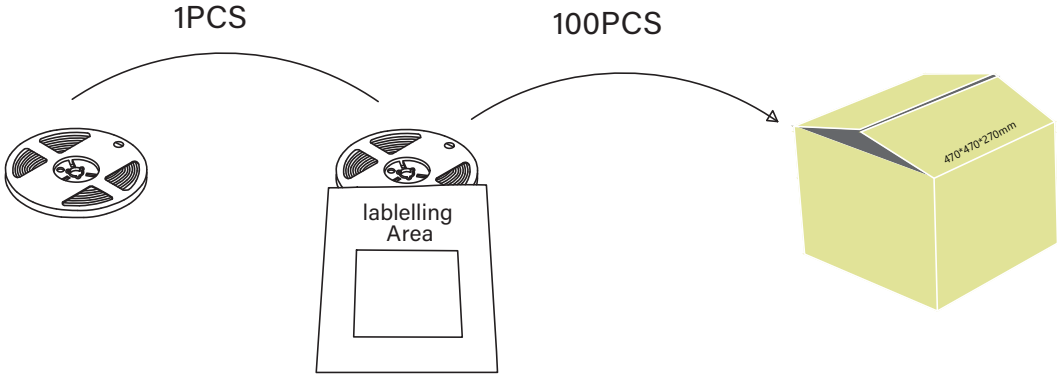

! Cautions

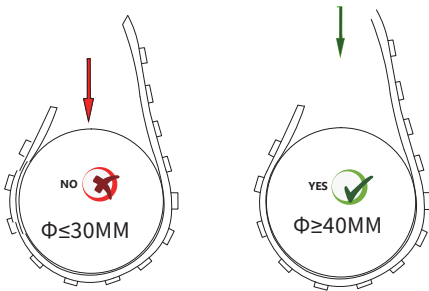

<50mm diameter of wrapped object prohibited

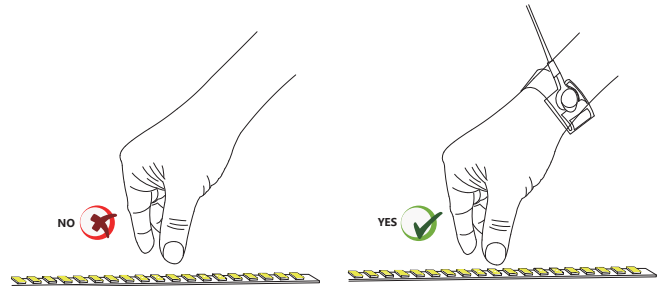

Pls wear the electrostatics ring for avoid ESD

✓ Safety & Disclosures

1. Do not install the led strip in environment where excessive heat may occur.
2. Do not extend beyond the recommended maximum run length.
3. Only use copper wiring. Use wires rated for at least 176°F(80°C) and certified for use with external connection of electrical equipment.
4. Do not install IP20 LED strip products in outdoor / wet location environments.
5. Excessive handling, bending, and pressure may damage the product, voiding the warranty.
6. Improper wire selection and installation could overheat wires, and cause fire.
7. Do not connect directly to high voltage or AC power.
8. Installation must be in accordance with local and national electrical code regulations.
9. To ensure safety and correct installation, our strips are intended to be installed by a qualified, licensed electrician.