

PRODUCT DATA SHEET



Side Emitting

3014 60LEDs/m 4.8W/m

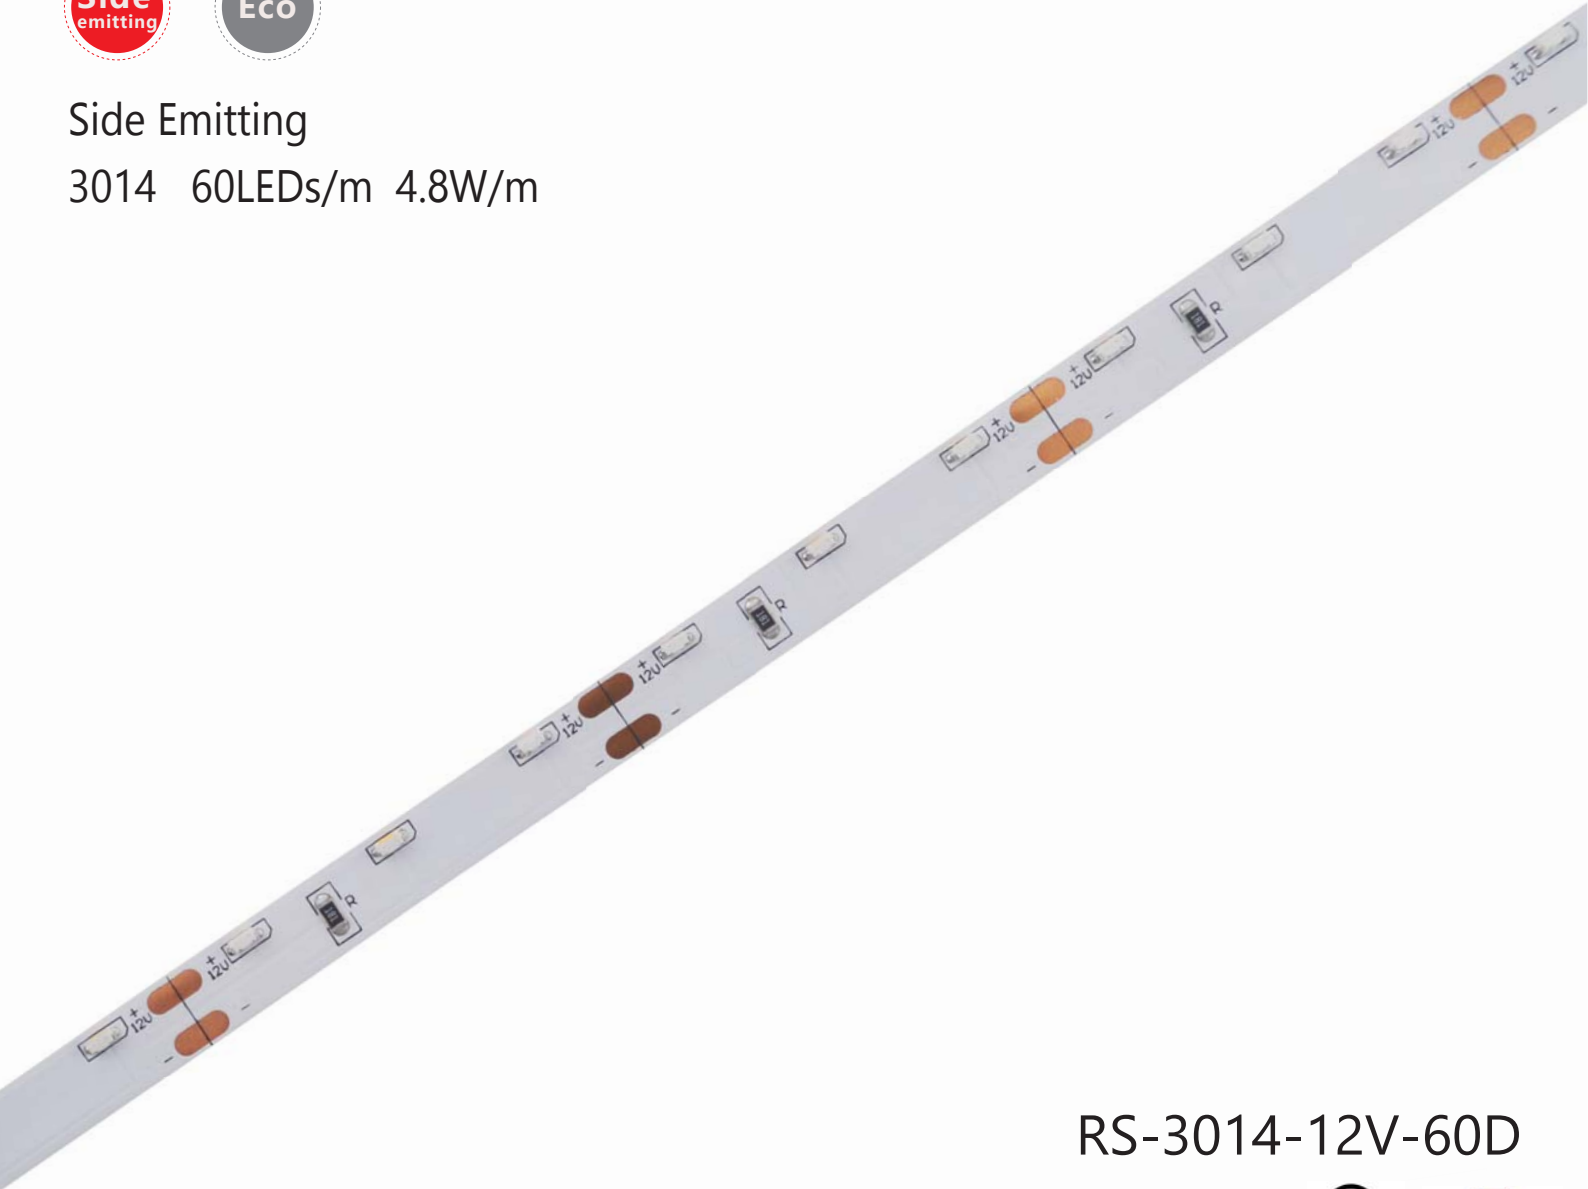

RS-3014-12V-60D




 Product Features

1. ▶ 3014 side emitting LED as light source, higher efficiency than traditional 315 and 335 LED
2. ▶ 8mm width PCB, 50mm cuttable, for more applications
3. ▶ Ideal for office, residential, retail and industry lighting


 CCT Option



IP Rating Option



Dimensions

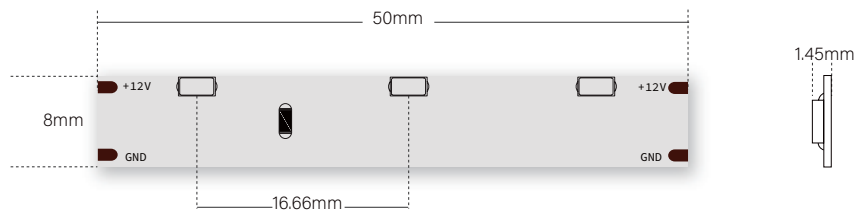

Note:

LED strip length tolerance is + -0.2%mm.
Width tolerance is + -0.2%mm.
Size of each section is 50mm.
DC 12V

 **Diagram**

Dimenions mm/inch

Length/Reel	Width	Height	Min. Cutting ✂
5000/196.85	8/0.3149	1.45/0.0570	Every 50mm/1.9685inch (3 LEDs)

 **Data**

Part Number	Working Voltage	Power (W/m)	Current (A/m)	LED Qty/m	CRI
RS-3014-12V-60D	12V	4.8W/m	0.4005A/m	60	80+

CCT (°K)	Luminous Efficiency	lumen/m
2700K	91.08lm/W	437.6lm/m
3000K	91.08lm/W	437.6lm/m
4000K	101.29lm/W	486.2lm/m
6000K	101.29lm/W	486.2lm/m


Note:

The data base on IP20 non-waterproof.
The Lumen output value tolerance + -5% due to testing way.
The CCT will be + -100k tolerance.


Absolute Maximum Ratings

Parameter	Symbol	Value	Units
Thermal Measurement Point	Tc	80	
Operating Temperature	Topr	-20~+40	°C
Storage Temperature	Ts	-20~+80	
Number of FPC Connection			


Wiring Diagram Application

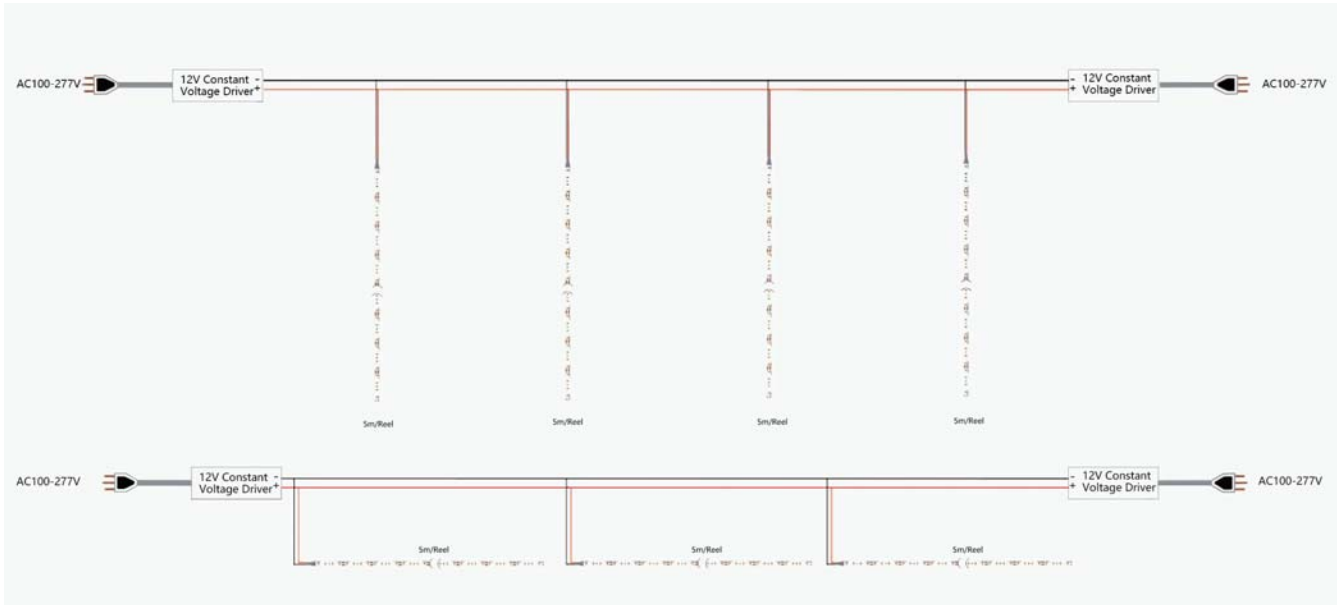


Packaging

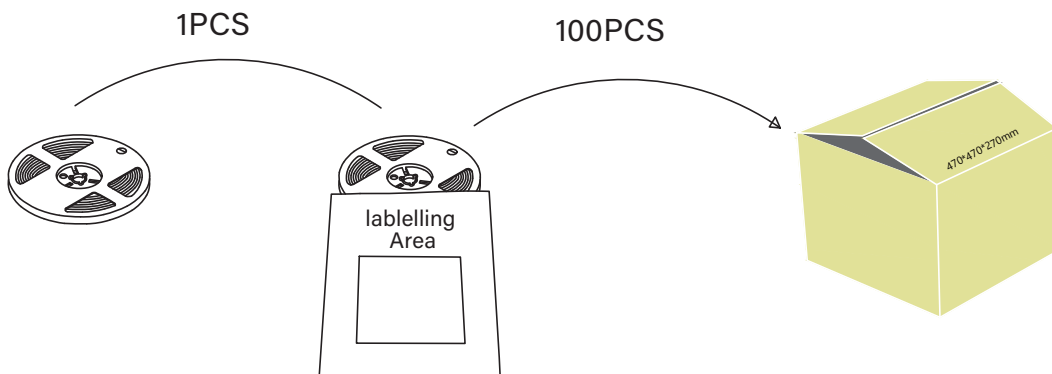

! Cautions

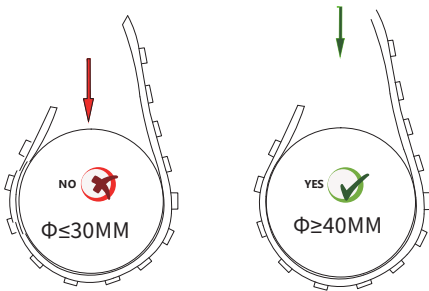

<50mm diameter of wrapped object prohibited

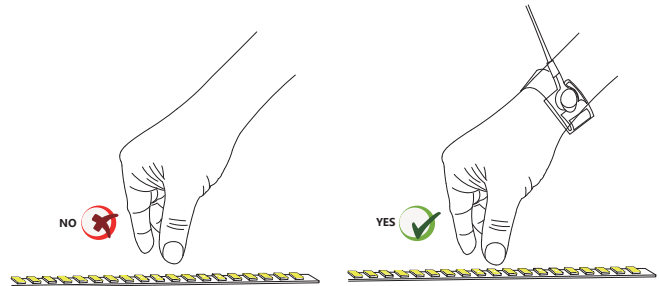

Pls wear the electrostatics ring for avoid ESD

✓ Safety & Disclosures

1. Do not install the led strip in environment where excessive heat may occur.
2. Do not extend beyond the recommended maximum run length.
3. Only use copper wiring. Use wires rated for at least 176°F(80°C) and certified for use with external connection of electrical equipment.
4. Do not install IP20 LED strip products in outdoor / wet location environments.
5. Excessive handling, bending, and pressure may damage the product, voiding the warranty.
6. Improper wire selection and installation could overheat wires, and cause fire.
7. Do not connect directly to high voltage or AC power.
8. Installation must be in accordance with local and national electrical code regulations.
9. To ensure safety and correct installation, our strips are intended to be installed by a qualified, licensed electrician.