



PRODUCT DATA SHEET







SMD 2110 Top Series 2110 140 LEDs/m 9.6W/m

RS-2110-24V-140D-8-20















Product Features

- 1. Source by high output 2110 Top Led with uniform illumination
- 2. High Brightness, Efficiency, Customized Wattage, Luminous Flux per M
- 3. CRI90+ and CRI98+ are available.
- 4. Mini Size of LED chip but strong body

⊞ CCT Option









IP Rating Option














IP67
Silicone integrated molding/Extrusion



IP68 Sillcone tube injected silicone glue

Dimensions





Note:

LED strip length tolerance is + -0.2%mm. Width tolerance is + -0.2%mm. Size of each section is 50mm. DC 24V









Dimension (mm)

Length/Reel	Width	Height	Min. Cutting 🍾
5000	8	1.75	Every 50 mm (7 LEDs)



Part Number	Working Voltage	Power (W/m)	Current (A/m)	LED Qty/m	CRI
RS-2110-24V-140D-8-20	24V	9.6W/m	0.4A/m	140D	90+

CCT (°K)	Luminous Efficiency	lumen/m
2700К	86.21lm/W	889.7lm/m
3000К	86.21lm/W	889.7lm/m
4000K	90.75lm/W	936.5lm/m
6000K	90.75lm/W	936.5lm/m

Note:

The data base on IP20 non-waterproof.
The Lumen output value tolerance + -5% due to testing way.
The CCT will be + -100k tolerance.









Absolute Maximum Ratings

Parameter	Symbol	Value	Units
Thermal Measurement Point	Tc	80	
Operating Temperature	Topr	-20~+40	℃
Storage Temperature	Ts	-20~+80	
Number of FPC Connection			

Wiring Diagram Application

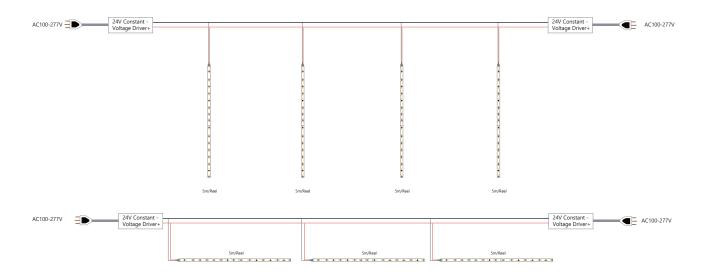

Packaging

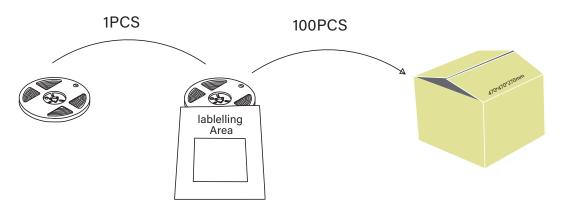











Cautions





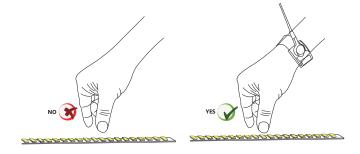

Pls wear the electrostatics ring for avoid ESD

Safety & Disclosures

- 1. Do not install the led strip in environment where excessive heat may occur.
- 2. Do not extend beyond the recommended maximum run length.
- 3. Only use copper wiring. Use wires rated for at least 176°F(80°C) and certified for use with external connection of electrical equipment.
- 4. Do not install IP20 LED strip products in outdoor / wet location environments.
- 5. Excessive handling, bending, and pressure may damage the product, voiding the warranty.
- 6. Improper wire selection and installation could overheat wires, and cause fire.
- 7. Do not connect directly to high voltage or AC power.
- 8. Installation must be in accordance with local and national electrical code regulations.
- 9. To ensure safety and correct installation, our strips are intended to be installed by a qualified, licensed electrician.