


PRODUCT DATA SHEET



CCT Adjustable Series
2110 704 LEDs/m 18W/m 10mm

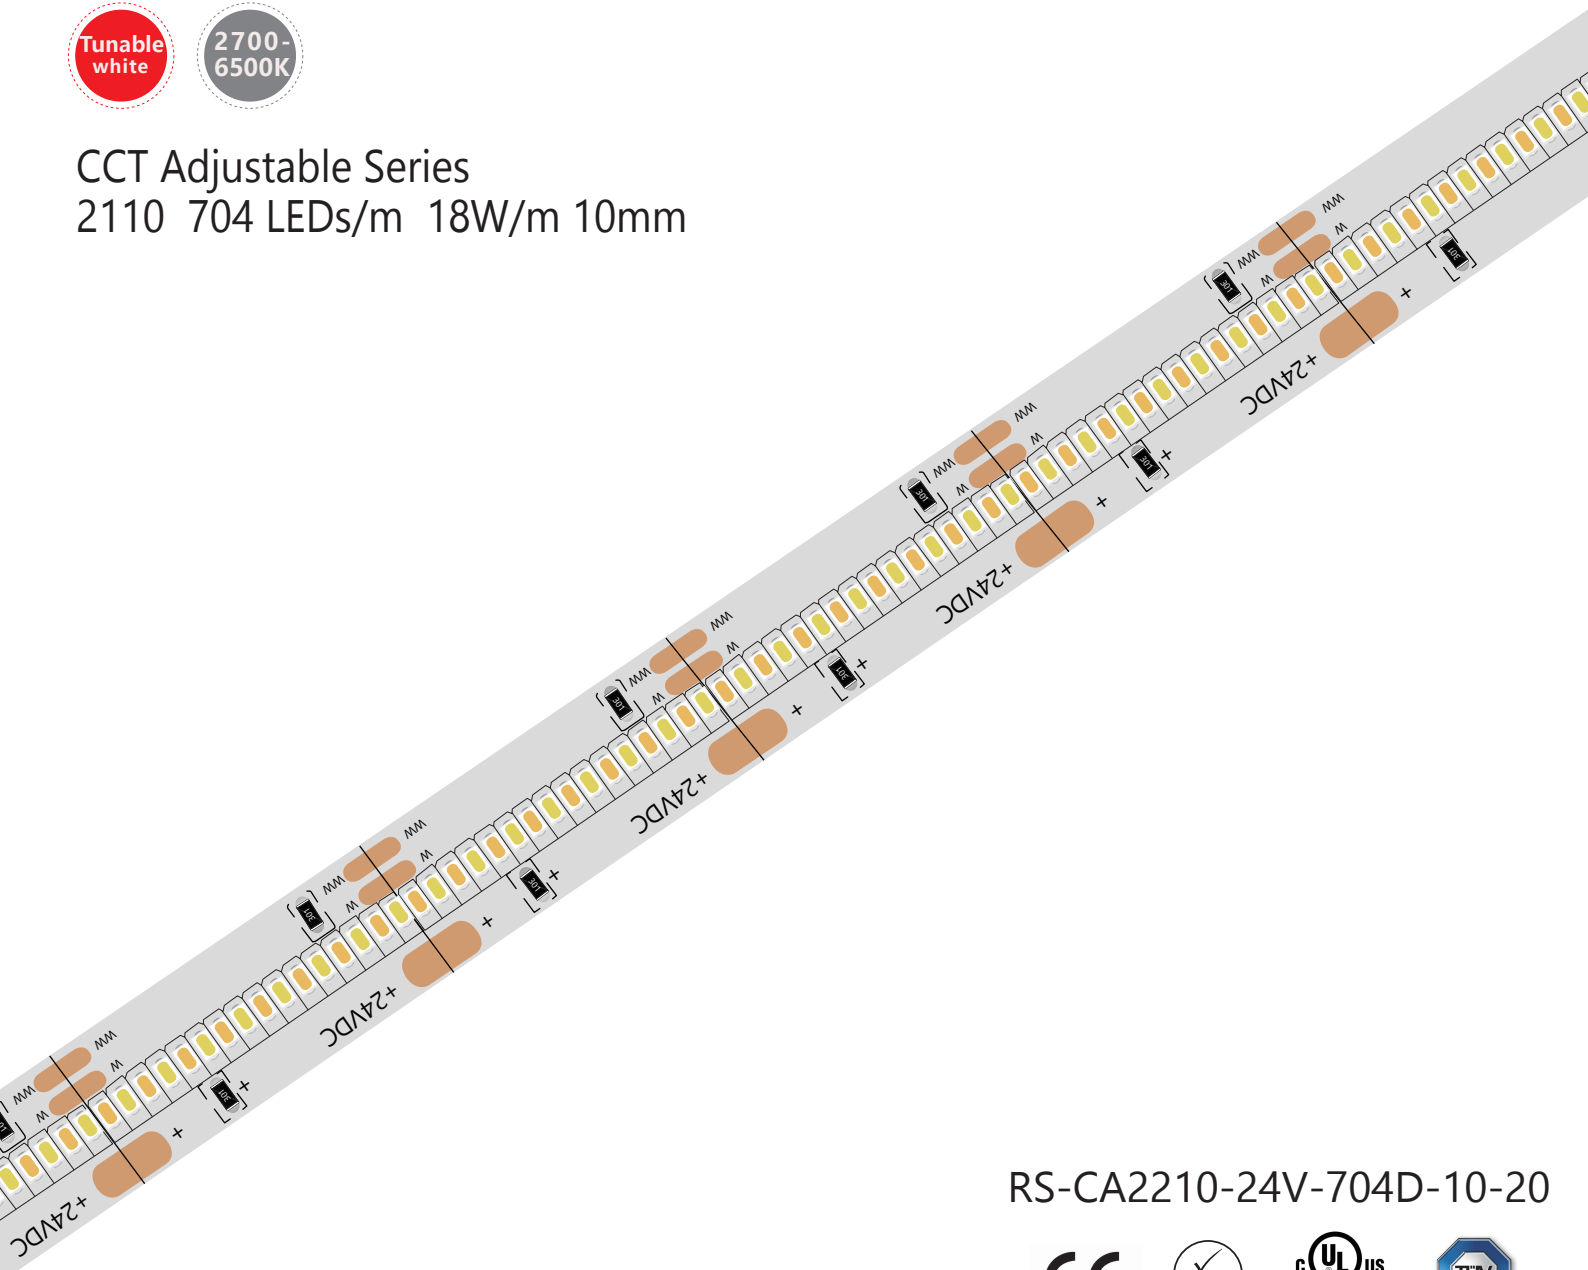


RS-CA2210-24V-704D-10-20




 Product Features

- 1. ▶ Source by high output 2110Led with uniform illumination
- 2. ▶ High Brightness, Efficiency, Customized Wattage, Luminous Flux per M
- 3. ▶ Tunable white 2700-6500K


 CCT Option



 IP Rating Option

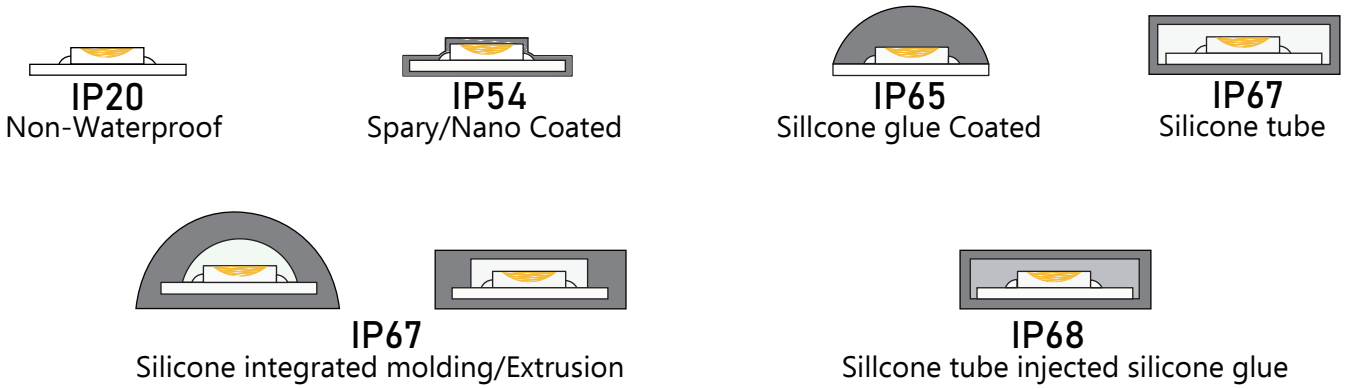

 Dimensions

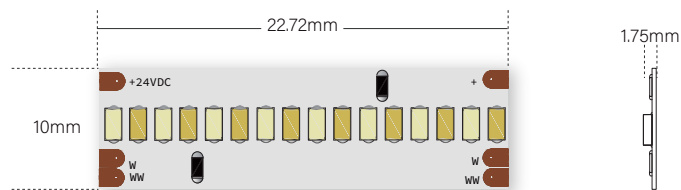

Note:

LED strip length tolerance is + -0.2%mm.
 Width tolerance is + -0.2%mm.
 Size of each section is 22.72mm.
 DC 24V


Diagram
Dimension (mm)

Length/Reel	Width	Height	Min. Cutting ✂
5000	10	1.75	Every 22.72mm (16 LEDs)


Data

Part Number	Working Voltage	Power (W/m)	Current (A/m)	LED Qty/m	CRI
RS-CA2110-24V-704D-10-20	24V	18W/m	0.75A/m	704	90+

CCT (°K)	Luminous Efficiency	lumen/m
2700K(9W)	91lm/W	819lm/m
4000K(18W)	96lm/W	1728lm/m
6500K(9W)	106lm/W	954lm/m


Note:

The data base on IP20 non-waterproof.
 The Lumen output value tolerance + -5% due to testing way.
 The CCT will be + -100k tolerance.


Absolute Maximum Ratings

Parameter	Symbol	Value	Units
Thermal Measurement Point	Tc	80	
Operating Temperature	Topr	-20~+40	°C
Storage Temperature	Ts	-20~+80	
Number of FPC Connection			


Wiring Diagram Application

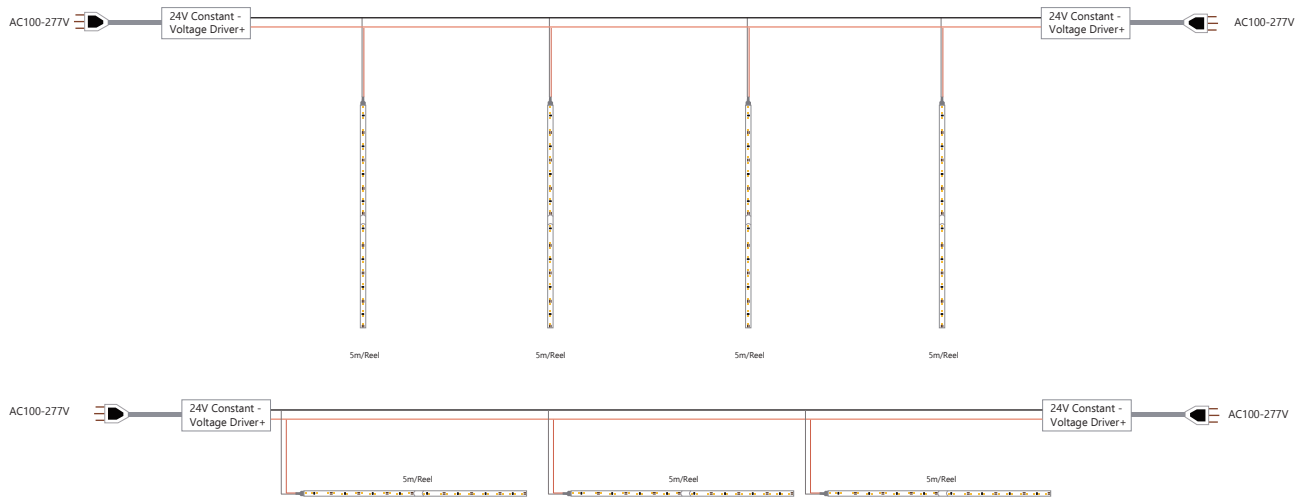


Packaging

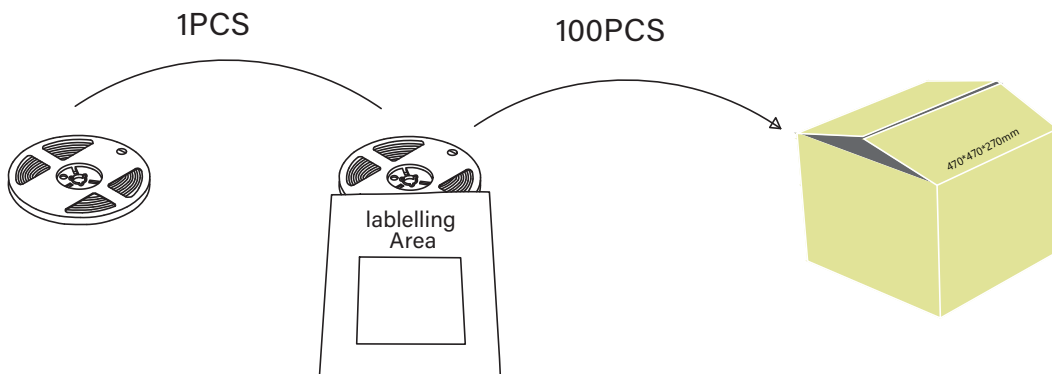

! Cautions

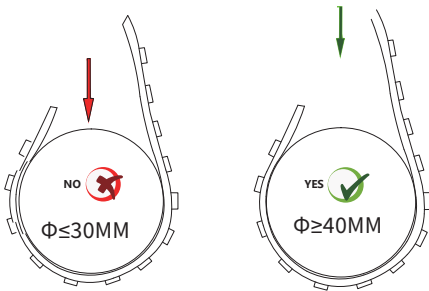

<50mm diameter of wrapped object prohibited

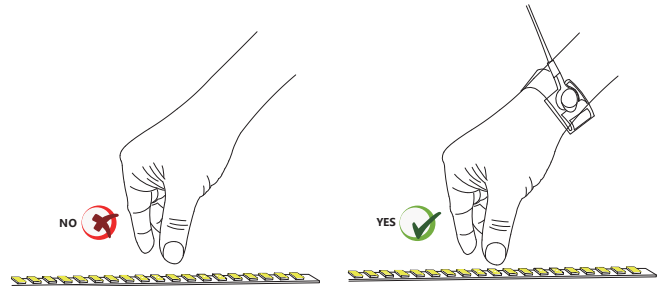

Pls wear the electrostatics ring for avoid ESD

✓ Safety & Disclosures

1. Do not install the led strip in environment where excessive heat may occur.
2. Do not extend beyond the recommended maximum run length.
3. Only use copper wiring. Use wires rated for at least 176°F(80°C) and certified for use with external connection of electrical equipment.
4. Do not install IP20 LED strip products in outdoor / wet location environments.
5. Excessive handling, bending, and pressure may damage the product, voiding the warranty.
6. Improper wire selection and installation could overheat wires, and cause fire.
7. Do not connect directly to high voltage or AC power.
8. Installation must be in accordance with local and national electrical code regulations.
9. To ensure safety and correct installation, our strips are intended to be installed by a qualified, licensed electrician.